



S&P USA


Qty:	1
Tag:	
Project:	CWD Explosion

CWD090A *

Centrifugal Sidewall Exhauster-Direct Drive

STANDARD FEATURES:

- AMCA Air and Sound Licensed
- UL/UL-C 705 and CSA Certified
- Standard Disconnect
- Heavy Gauge Aluminum Construction
- Statically and Dynamically Balanced Aluminum Wheel
- 5 Year Fan and 1 Year Motor Warranty
- Vented Motor Cover for Maximum Cooling
- Conduit Wiring Chase Provided
- Low Profile
- Integral Deep Spun Inlet

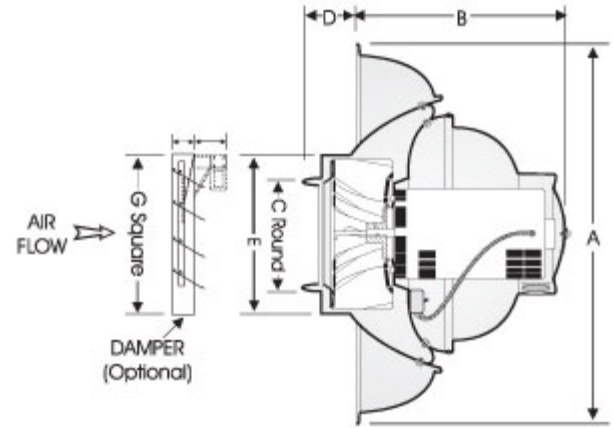

Performance

Fan RPM	Flow (CFM)	SP (in W.G.)	Power (HP)	SE	TE	FPM (TS)	FPM (OV)
1540	1043	.2	.233	14%	19%	3629	1043

Altitude (Feet): n/a Temperature (Fahrenheit): n/a Density (Lb/Ft3): .075

Motor Information: (Wired for 115V)

HP	RPM	Volts/PH/Hz	Enclosure	Efficiency	Mounted
.25	1725	115V/208V-230V/1PH/60HZ	EXPLOSION PROOF	STANDARD	YES

Sound Power Levels - Octave Bands

LwA	DBA	Sone	1	2	3	4	5	6	7	8
72.9	61.4	10.9	74.5	77.5	71.5	70.6	66.5	64.5	61.6	56.4

Submittal Notes:

Dimensions (Inches)

A	26	B	13.5	C	11.9375	D	2	E	15
F		G	14	H		I		J	
K		L		M		N		O	
P		Q		R		S		T	
U		V		W		X		Y	

Note: Accessories may effect dimensions shown.

Avg. Shipping Weight (Lbs)*: 65

*Includes fan, motor, and packaging.

Accessories:

