S&P USA

Qty:	1
Tag:	
Project:	CWD-Final

CWD091A*

Centrifugal Sidewall Exhauster-Direct Drive

STANDARD FEATURES:
AMCA Air and Sound Licensed • UL/UL-C 705 and CSA Certified • Standard Disconnect • Heavy Gauge Aluminum Construction • Statically and Dynamically Balanced Aluminum Wheel • 5 Year Fan and 1 Year Motor Warranty • Vented Motor Cover for Maximum Cooling • Conduit Wiring Chase Provided • Low Profile • Integral Deep Spun Inlet •

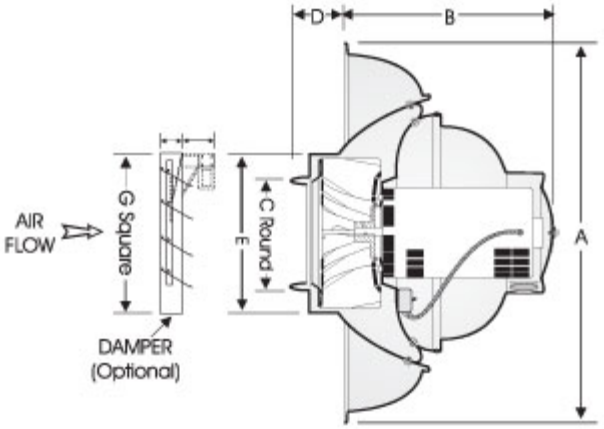

Performance

Fan RPM	Flow (CFM)	SP (in W.G.)	Power (HP)	SE	TE	FPM (TS)	FPM (OV)
1137	650	.2	.09	23%	26%	2679	650

Altitude (Feet): n/a Temperature (Fahrenheit): n/a Density (Lb/Ft3): .075

Motor Information: (Wired for 115V)

HP	RPM	Volts/PH/Hz	Enclosure	Efficiency	Mounted
.25	1725	115V/208V-230V/1PH/60HZ	EXPLOSION PROOF	STANDARD	YES

Sound Power Levels - Octave Bands										
LwA	DBA	Sone	1	2	3	4	5	6	7	8
64.0	52.5	6.4	72.1	66.8	62.6	62.5	56.5	56.5	50.0	44.2

Submittal Notes:

Dimensions (Inches)

A	26	B	13.5	C	11.9375	D	2	E	15
F		G	14	H		I		J	
K		L		M		N		O	
P		Q		R		S		T	
U		V		W		X		Y	

Note: Accessories may effect dimensions shown.

Avg. Shipping Weight (Lbs)*: 65
*Includes fan, motor, and packaging.
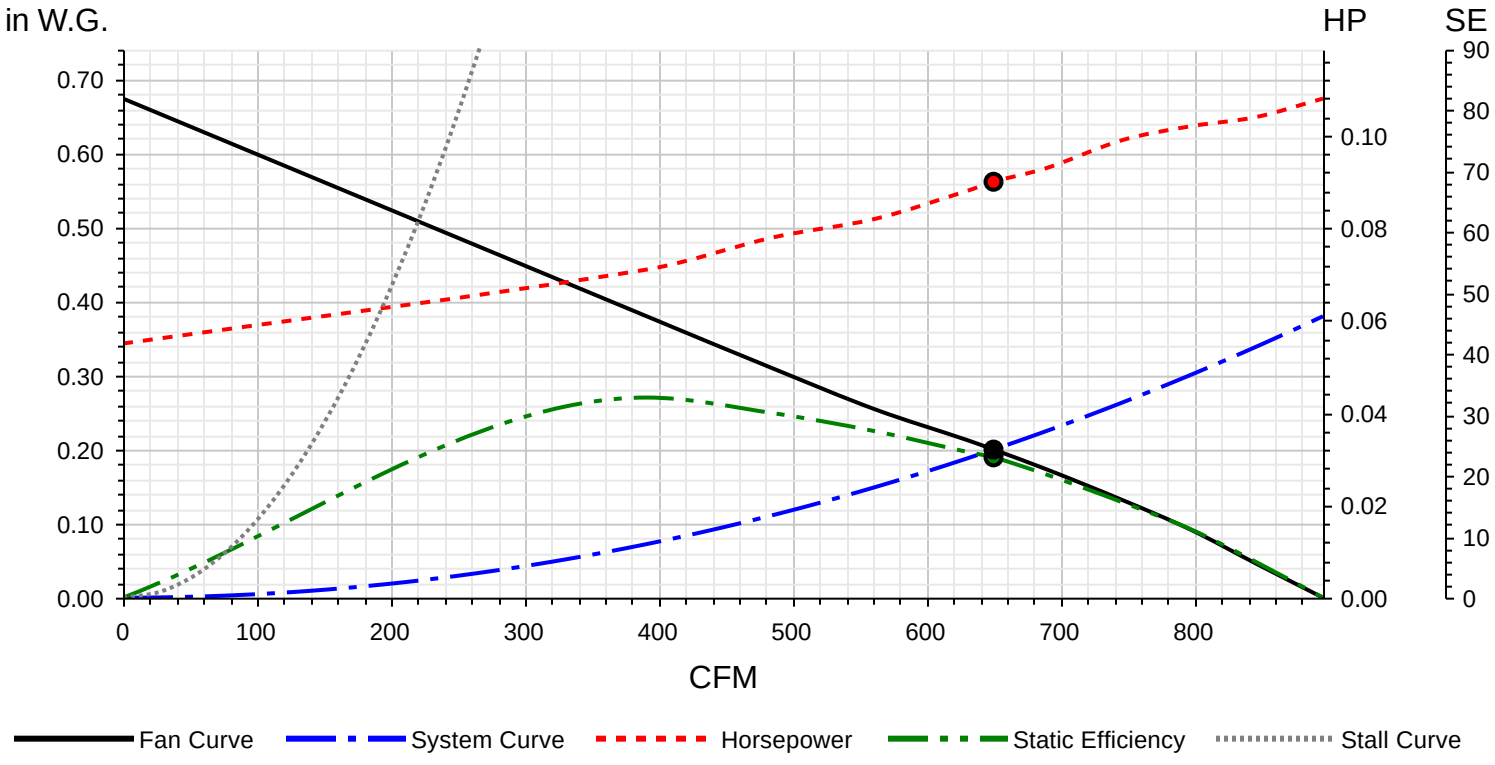
Accessories: