

# Portable 18" Self Contained Power Mister



**SELF CONTAINED MISTING SYSTEM WITH WATER PUMPED FROM A 10 GALLON TANK OR VESSEL.**

### Features

- Toggle Switch - Pump on/off
- SJT type cord - 3 conductor - 18' long with GFCI plug
- 18" Aluminum blade
- Spiral front and rear wire guards
- Standard model - Low Pressure 85 PSI diaphragm pump
- HD model - Medium Pressure 125 PSI diaphragm pump
- Meets OSHA standards / 1 year limited warranty / Made in U.S.A.

### Motor Specification

- 3-Speed, 1/10 HP
- Sleeve bearing
- Permanently lubricated
- 1-Phase, 120 Volt
- Totally enclosed
- Permanent split capacitor

**WARNING:** This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Note: Tank lid not included.

### Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN SIZE	TYPE	MOTOR HP	CFM*	AMPS	WT. (LBS)	VELOCITY PROFILE	LIST
								CFM / Area Sq Ft	
08554702	PM-18S	18"	HAND CARRY	1/10	1900	1.1	30	3100 / 140	1236
08775702	PM-18S-HD								1292
08554902	PM-18C	18"	CART	1/10	1900	1.1	30		1571
08775602	PM-18C-HD								1628
08760702	NK-PM18	---	REPLACEMENT NOZZLE KIT				---		29


\*Measured 2 feet from face of fan

### 18" Fan & Pump Lid for 10gal. Tank

MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)	LIST
08555202	PM-18FO	28	1059
08775802	PM-18FO-HD	28	1115

## Industrial Ceiling Fans

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

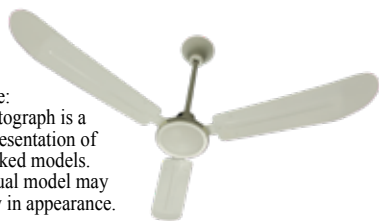

**WARNING:** This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Features

- All metal construction, white epoxy finish
- 24" down rod with safety cable
- Mounts to 3/8" diameter steel J-hook
- 18 pole (motor), 115V, 1-Phase, capacitor type, impedance protected motor with sealed ball bearings
- Imported to TPI specifications

### Commercial Grade

- Assembly required
- 30" lead wires
- 1 year limited warranty

### Industrial Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 3 year limited warranty

### Heavy Duty Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 6 year limited warranty

### Standard Models

GRADE	MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	SIZE	VOLTS	CFM	RPM	AMPS	WT. (LBS)	LIST
Commercial	08529602	CHR-56*	Down Draft	56"	120	7000	320	0.6	15	201
Industrial	07979902	IHR-48	Down Draft	48"	120	5000	320	0.53	14	270
Industrial	07971502	IHR-56	Down Draft	56"	120	7000	310	0.6	15	284
Industrial	07980002	IHR-56R*	Reversible	56"	120	7000	310	0.55	14	289
Industrial	08008902	IHR-56-277V*	Down Draft	56"	277	7000	310	0.3	16	289
Water and Dust Resistant Models										
Heavy Duty	08540802	HDHR-56WR	Down Draft	56"	120	7000	320	1.1	17	399
Heavy Duty	08540902	HDHR-60WR	Down Draft	60"	120	7800	320	0.8	21	449

\* 277 volt, commercial, and reversing models have lead wires instead of cordset. 36" down rod available for additional charge.

### Solid State Controls (120 & 277V Models)

MFG CATALOG NUMBER	MFG MODEL NUMBER	VOLTS	MAX AMPS	VARIABLE CONTROL KNOB	REVERSING SWITCH	MAX # OF FANS	USE WITH CEILING FAN MODEL	LIST
07976302	KBWC-13K	120	3	YES; W/3" X 5" ALUMINUM PLATE (FITS 2" X 4" OPENING)	No	1-2	CHR-56, IHR-48/56, HDHR-56/60-WR	53
07976402	KBWC-15K	120	5			3-5	CHR-56, IHR-48/56, HDHR-56/60-WR	125
07994102	KBWC-110K	120	10			6-10	CHR-56, IHR-48/56, HDHR-56/60-WR	183
08666802	KBWC-15SK	120	5		Yes	3-5	IHR-56R	168
08526502	KBWC-310K	277	10		No	6-10	IHR-56-277V	351

### Options

MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	LIST
08512202	HR-GUARD	FOR 56" MODELS	1119
08504202	ADD SUFFIX; "X3"	36" DOWN ROD OPTION	+54 Adder