


PROTECTO-GUARD

CEILING FAN GUARDS

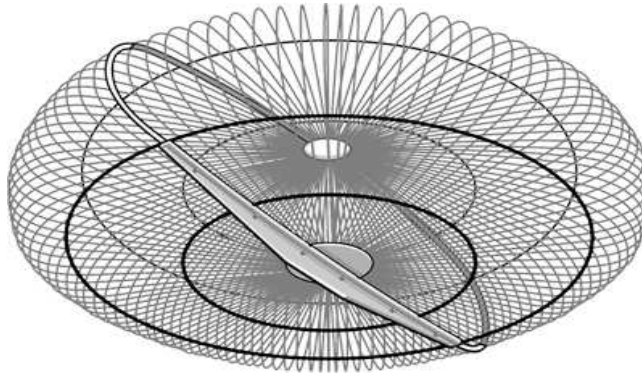

SPECIFICATIONS

- ✓ 40" to 64" in diameter
- ✓ 6' long, 1/8" Secondary Support Cable with four cable clamps
- ✓ Depth: 10" at base 9" at outer edge
- ✓ Weight: 24 lbs. to 60 lbs.
- ✓ Wire spacing: approximately 1.5"(regular) or 3"(economy) at circumference
- ✓ Finished in non-rusting bright zinc plating
- ✓ Fully encloses fan
- ✓ Installs easily with only 12 bolts and nuts
- ✓ Heavy-duty, non-sagging wires, double welded and riveted
- ✓ Tested at high speeds to resist penetration of small objects
- ✓ Ceiling fan functions smoothly in spite of errant balls or objects
- ✓ 1.5"(regular) or 3"(economy) spacing of wire allows maximum air flow
- ✓ Gentle pitching allows objects to roll off top of guard
- ✓ Fits most fans up to 60" in diameter

APPLICATIONS

Public Buildings
Schools
Gymnasiums
Arenas
Tennis and Racquetball Courts
Warehouses
Factories
Farm Buildings

Northwest Envirofan

Division of Northwest Environmental Systems, Inc.

Envirofan and Agrifan Overhead Ceiling Fans - Protecto-Guard Fan Guards - Fan Controls

920-235-7808 800-236-7080 (FAX) 920-235-3049