


# SELECTION CHART

Applications by Door Height	*Wind Conditions are Classified as Follows:						
	● GENTLE=1 to 5mph ○ LIGHT=5 to 8mph ■ MODERATE=8 to 12mph □ STRONG=12 to 15 ◇ SEVERE=15 to 21mph						
Basic Motor HP / Series	Low Profile	Environmental Series			High Velocity Series		
	1/8 HP	1/4 HP	1/2 HP	3/4 HP	1 HP	1 1/2 HP	3 HP
<b>RETAIL APPLICATIONS</b>							
<b>THERMAL BARRIER</b>							
7' RETAIL ENTRANCE	●						
<b>COMMERCIAL APPLICATIONS</b>							
<b>INTERIOR SEPARATION</b>							
8' INTERIOR		●					
10' INTERIOR			●				
<b>THERMAL BARRIER</b>							
8' EXTERIOR		○	■		□		
10' EXTERIOR			○	■			
<b>FOOD SERVICE APPLICATIONS</b>							
<b>THERMAL BARRIER</b>							
7' CUSTOMER ENTRANCE		○					
8' CUSTOMER ENTRANCE		○					
<b>FLY &amp; INSECT CONTROL</b>							
7' SERVICE ENTRANCE			■		□		
8' SERVICE ENTRANCE			○	■			
<b>REFRIGERATION APPLICATIONS</b>							
<b>THERMAL BARRIER</b>							
7' COOLER	●						
8' COOLER		●					
10' COOLER			●				
12' COOLER				●			
8' FREEZER			●				
10' FREEZER				●			
12' FREEZER				●			
<b>SANITATION APPLICATIONS</b>							
<b>FLY &amp; INSECT CONTROL</b>							
8' EXTERIOR			■		□	◇	
10' EXTERIOR				■	□		
<b>LIGHT INDUSTRIAL APPLICATIONS</b>							
<b>INTERIOR SEPARATION</b>							
12' INTERIOR OPENING				○			
14' INTERIOR OPENING					○		
<b>WIND RESISTANCE</b>							
10' EXTERIOR DOORWAY				■	□	◇	
12' EXTERIOR DOORWAY					○	■	
14' EXTERIOR DOORWAY						○	

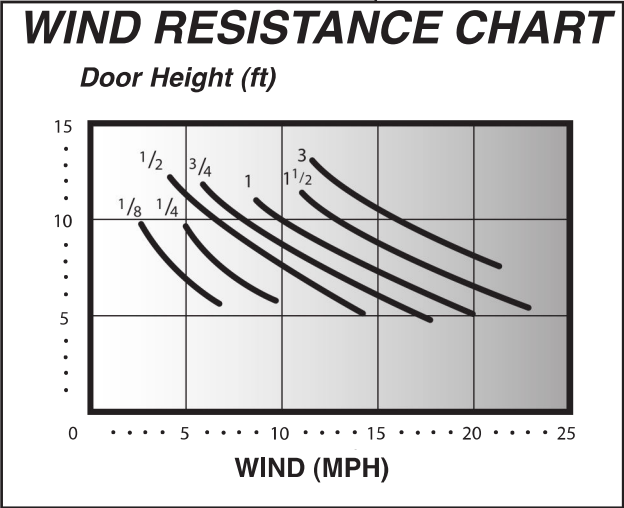

\* Guide does not include negative pressures or wind tunnel conditions. Wind resistance values are for normal applications.