



Barnstormer

J&D Manufacturing's Barnstormer is a dependable leader in air recirculation. The patented open-front guard is an exclusive feature that drastically reduces cleaning and maintenance time. The Barnstormer's tapered guard creates a high velocity air pattern that allows greater distance between fans, which means less fans in your facility and more money in your pocket.

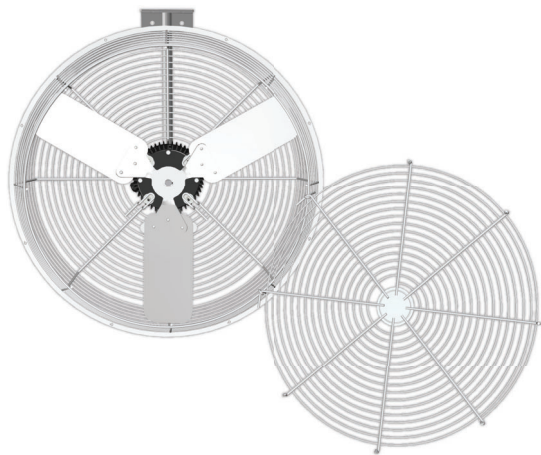

Patented Open-Front Guard

J&D has the only fans on the market with the hinged open-front guard. This patented design helps cut cleaning and maintenance time. Dirt and dust are removed in minutes to get you right back to energy-efficient, high-output performance.

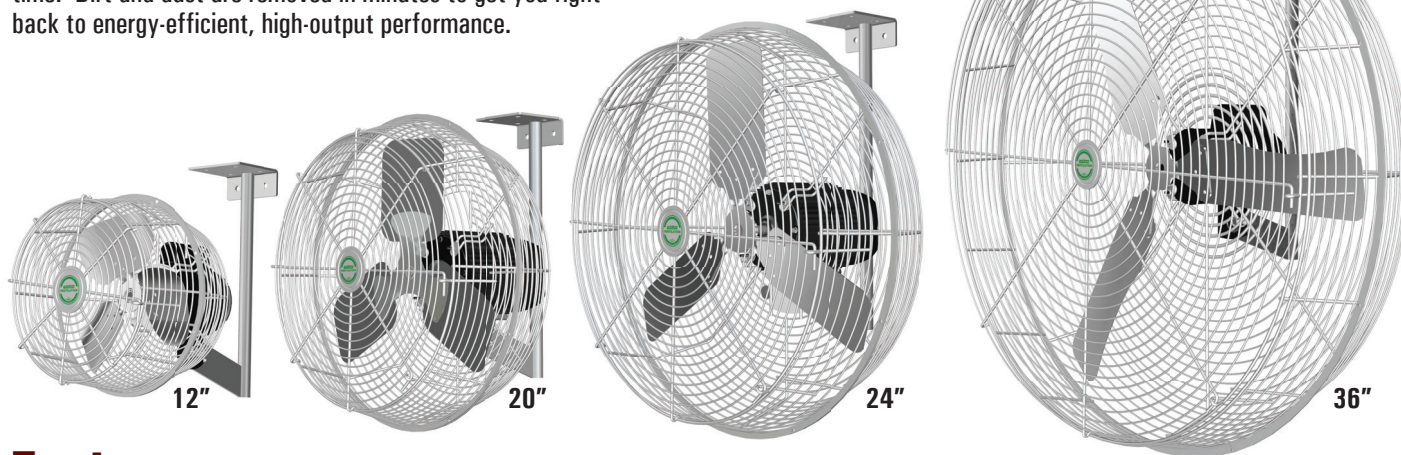

Features

- Patented open-front guard for easy maintenance (U.S. Patent No. 5,348,447)
- Fan ships fully assembled and ready for installation
- Includes hot dip galvanized ceiling mount bracket
- Industry leading air velocity
- Quiet operation
- Direct drive motors with no belts or bearings to maintain
- Gold Star Motors are IP66-Rated
- Compatible with our misting/fogging product line
- Guards are white powder coated for easy cleaning and corrosion resistance
- 20" Gold Star Motor model and 12" single phase standard motor model offer variable speed (*requires separate variable speed control to adjust fan speed*)
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, are UL and CUL recognized, and are covered by a **2 Year Warranty**
- Motors have built-in automatic thermal overload protection for the longest motor life possible

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Barnstormer



| Part# | Size | Ph | Spd | Thrust CFM | Thrust CFM/Watt | Drive | Prop | Included Bracket |
|---------------------|------|----|--------|--------------|-----------------|--------|-------|------------------|
| Single Phase | | | | | | | | |
| * VBS20-GS | 20" | 1 | 1/Var^ | 3,920 | 9.3 | Direct | 3-Alm | VRSBR8-HDG |
| VBS24-GS | 24" | 1 | 1 | 6,070 | 11.5 | Direct | 3-Alm | VRSBR5-HDG |
| VBS36A-GS | 36" | 1 | 1 | 9,650 | 19.0 | Direct | 3-Glv | VRSBR6-HDG |
| Three Phase | | | | | | | | |
| VBS36CF-GS | 36" | 3 | 1 | 9,740 | 21.5 | Direct | 3-Glv | VRSBR6-HDG |



| Part# | Size | Ph | Spd | Thrust CFM | Thrust CFM/Watt | Drive | Prop | Included Bracket |
|---------------------|------|----|--------|---------------|-----------------|--------|-------|------------------|
| Single Phase | | | | | | | | |
| VBS12 | 12" | 1 | 1/Var^ | 810 | 7.2 | Direct | 3-Alm | VRSBR736-HDG |
| VBS20 | 20" | 1 | 1 | 3,650 | 11.8 | Direct | 3-Alm | VRSBR8-HDG |
| VBS24 | 24" | 1 | 1 | 5,250 | 12.1 | Direct | 3-Alm | VRSBR5-HDG |
| * VBS36A | 36" | 1 | 1 | 10,050 | 17.6 | Direct | 3-Glv | VRSBR6-HDG |
| Three Phase | | | | | | | | |
| VBS203 | 20" | 3 | 1 | 3,580 | 12.2 | Direct | 3-Alm | VRSBR8-HDG |
| VBS243A | 24" | 3 | 1 | 5,470 | 12.5 | Direct | 3-Alm | VRSBR5-HDG |
| * VBS36CF | 36" | 3 | 1 | 10,000 | 20.3 | Direct | 3-Glv | VRSBR6-HDG |

* Experts choice

^ Variable speed fans require separate variable speed control to adjust fan speed

Standard Barnstormers do not come with a cord. Models pre-wired with a cord are available as a special order with price adjustment

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

OSHA requires this fan to be mounted a minimum of 7' above the floor



Optional Mounting Brackets



VRSBR14



VRSBR143, VRSBR144, VRSBR14412

| Part # | Compatible Fan Size | | | | Description | Powder Coated Black | Hot Dip Galv. |
|------------------------|---------------------|-----|-----|-----|---|---------------------|---------------|
| | 12" | 20" | 24" | 36" | | | |
| Side Mount Brackets | | | | | | | |
| VRSBR14 | X | X | X | X | 42" Extended Bracket, fits Sq. or Round Up Post | X | |
| VRSBR143 | X | X | X | X | 42" Extended Bracket, fits 3" Tube - Bolt On | X | |
| VRSBR144 | X | X | X | X | 42" Extended Bracket, fits 4" Tube - Bolt On | X | |
| VRSBR14412 | X | X | X | X | 42" Extended Bracket, 4½" Tube - Bolt On | X | |
| VRSBR901-HDG | X | X | X | X | Wall Mount Bracket | | X |
| Ceiling Mount Brackets | | | | | | | |
| VRSBR2-HDG | X | X | X | | 6-Way Bracket | | X |
| VRSBR3-HDG | | | | X | 6-Way Bracket | | X |
| Pole Mount Bracket | | | | | | | |
| VRSBR12 | X | X | X | X | Pole Bracket, fits 4"–4½" Tube | X | |
| VRSBR13 | X | X | X | X | Pole Bracket, fits 3"–3½" Tube | X | |



VRSBR901-HDG



VRSBR12
VRSBR13



VRSBR2-HDG
VRSBR3-HDG

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.