

Heavy-Duty Industrial Basket Fan

with 2 & 3-Speed High-Efficiency Motors

The J&D Heavy-Duty Industrial Basket Fan sets the standard in air performance. This fan was designed for the industrial market and provides the performance that is mandatory for machine efficiency and employee comfort.

Features

- 2-speed, non-oscillating and 3-speed, oscillating high-efficiency motor with pull chain
- Attached cord with 3-prong plug pre-wired for 115 Volts
- Direct drive - no belts or pulleys to maintain
- 20" and 24" models with a ¼ HP motor are available in black or white
- 30" oscillating model with a powerful ½ HP motor is available in black
- Oscillating models feature 80° pivot range
- Heavy gauge, corrosion-resistant powder coated guards
- Guards meet OSHA 1910.212(a)(5) requirements allowing this fan to be installed at any height
- Totally enclosed, maintenance-free, high-efficiency motors feature sealed ball bearings and are covered by a **2 Year Warranty**
- Compatible with our misting/fogging product line
- Optional wall or post mount brackets

MOUNTING BRACKETS ARE NOT INCLUDED

Select from the recommended brackets below to fit your installation needs.


| Part # | Description | Powder Coated Black | Hot Dip Galv. |
|----------------------------|---|---------------------|---------------|
| Side Mount Brackets | | | |
| VRSBR14 | 42" Extended Bracket, fits Sq. or Round Up Post | X | |
| VRSBR143 | 42" Extended Bracket, fits 3" Tube - Bolt On | X | |
| VRSBR144 | 42" Extended Bracket, fits 4" Tube - Bolt On | X | |
| VRSBR14412 | 42" Extended Bracket, 4½" Tube - Bolt On | X | |
| VRSBR901-HDG | Wall Mount Bracket | | X |



VRSBR14




VRSBR143
VRSBR144
VRSBR14412



Shown:
VRSBR901-HDG wall mount
bracket with oscillating fan

No electrician needed!
Hang it up
Plug it in

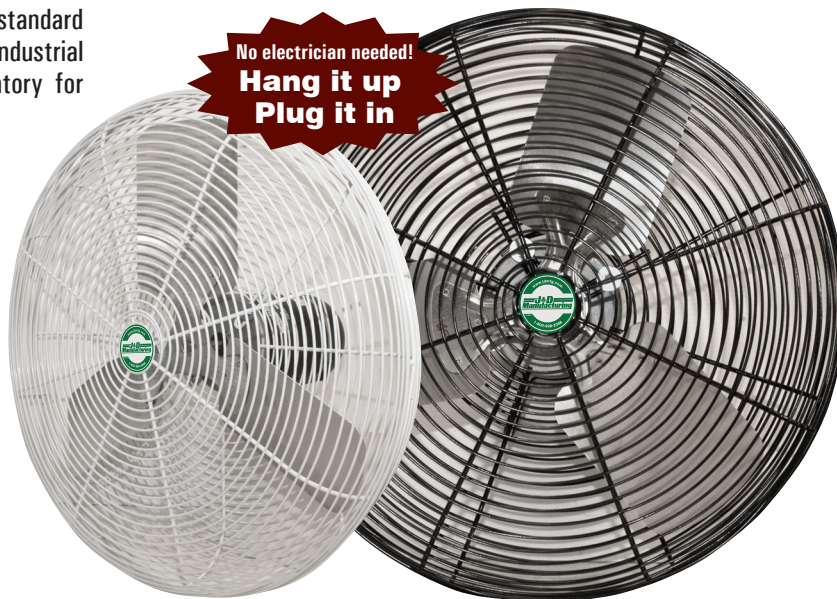

| Part# | Size | Ph | Spd | Thrust CFM | Thrust CFM/Watt | Drive | Prop |
|-------------------------------------|------|----|--------------------|--|---|--------|-------|
| Single Phase | | | | | | | |
| Non-Oscillating Black Models | | | | | | | |
| * VDF20HOB2 | 20" | 1 | 2(H) (L) | 2,550 1,900 | 13.3 12.7 | Direct | 3-Alm |
| VDF24HOB2 | 24" | 1 | 2(H) (L) | 3,700 2,050 | 15.5 13.0 | Direct | 3-Alm |
| Non-Oscillating White Models | | | | | | | |
| VDF20HOW2 | 20" | 1 | 2(H) (L) | 2,550 1,900 | 13.3 12.7 | Direct | 3-Alm |
| VDF24HOW2 | 24" | 1 | 2(H) (L) | 3,700 2,050 | 15.5 13.0 | Direct | 3-Alm |
| Oscillating Black Models | | | | | | | |
| VDF201HOB2 | 20" | 1 | 3(H) (M) (L) | 2,340 2,280 2,250 | 13.0 20.4 23.2 | Direct | 3-Alm |
| VDF241HOB2 | 24" | 1 | 3(H) (M) (L) | 3,820 3,350 3,050 | 15.7 20.2 21.5 | Direct | 3-Alm |
| VDF301HOB2 | 30" | 1 | 3(H) (M) (L) | 6,520 6,060 4,970 | 14.0 14.9 13.2 | Direct | 3-Alm |
| Oscillating White Models | | | | | | | |
| VDF201HOW2 | 20" | 1 | 3(H) (M) (L) | 2,340 2,280 2,250 | 13.0 20.4 23.2 | Direct | 3-Alm |
| VDF241HOW2 | 24" | 1 | 3(H) (M) (L) | 3,820 3,350 3,050 | 15.7 20.2 21.5 | Direct | 3-Alm |

* Experts choice

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.